




**SUPER PRECISION LOADCELL**

# TANKWEIGHING THE “EAZY MOUNT” WEIGH WITH QS SERIES LOADCELL




CAPACITIES AVAILABLE :  
5- 10 - 20\* - 30\* - 40T  
\*NORMALLY STOCKED


## TECHNICAL PARAMETERS

DIGITAL	
DIGITAL OUTPUT	1 Kg
DATA UPDATE	15Hz
COMMUNICATION	RS485 (HALF DUPLEX)
COMMUNICATION DISTANCE	MAX 1200M
TOTAL ERROR	0,02% Fs
SAFE OVERLOAD	150%
PROTECTION CLASS	IP67

ANALOGUE	
OUTPUT	2mV/V
CAPACITY	5 - 10 - 20- 30 - 40t
ACCURACY CLASS	OIML C1-C3 : 10 000 Div
SAFE OVERLOAD	150%
PROTECTION CLASS	IP67
INPUT IMPEDANCE	750 Ohm
OUTPUT IMPEDANCE	700 Ohm

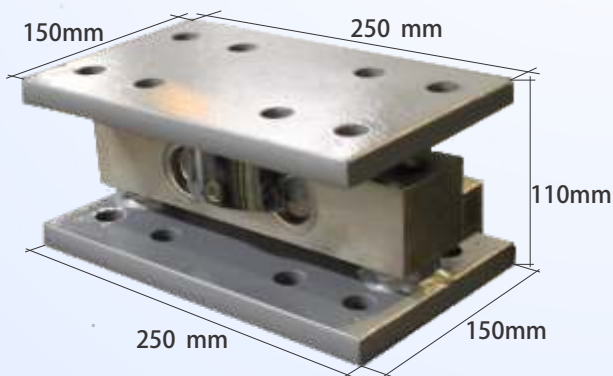

HOLE PATTERN  
FOR M16 BOLT ( DIAMETER - 8mm)  
(USE “A” HOLES ONLY)

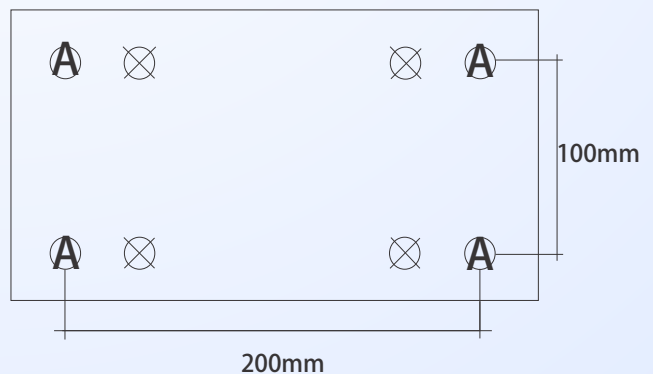

WITH DIGITAL LOADCELL'S CALIBRATION  
WITHOUT WEIGHT IS POSSIBLE TO AN  
ACCURACY OF BETTER THAN  $\pm 1\%FS$

